


METSÄBOARD PRIME FBB BRIGHT

Folding estucado blanco.

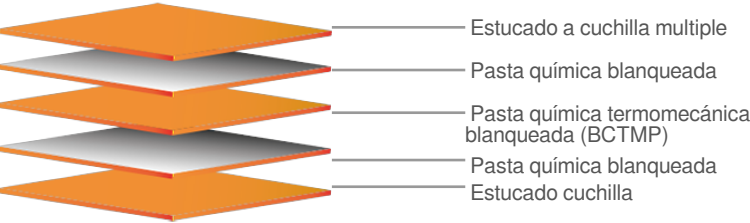

Métodos de impresión

Offset
Flexografía
Impresión digital
Huecograbado



ESPECIFICACIONES TÉCNICAS			
GRAMAJE (g/m ²) (ISO 536)	ESPESOR (µm) (ISO 534)	RIGIDEZ TABER 15° (mNm) (ISO 2493-2)	RIGIDEZ TABER 15° (mNm) (ISO 2493-2)
-	-	DM	DT
170	210	2.9	1.4
190	260	5.1	2.5
210	305	8.0	3.8
235	360	11.7	5.9
255	400	16.2	8.1
270	425	19.4	9.7
280	450	21.4	10.7
290	475	24.0	12.0
305	500	26.8	13.4
330	550	31.9	16.3
355	600	37.4	19.2
380	650	42.5	22.0
TOLERANCIA	+/- 2%	+/- 3%	- 15%

PROPIEDADES	
LISURA SUPERFICIE PPS10 (ISO 8791-4) (µm)	0.8 (max 1.3)
BLANCURA SUPERFICIE (ISO 2470-1) (%)	91.5 +/- 1%
BLANCURA REVERSO (ISO 2470-1) (%)	90.5 +/- 2%
BRILLO (HUNTER 75°) (%)	48 + 5%
ROBINSON TEST (12 meses en embalaje original)	< 1